






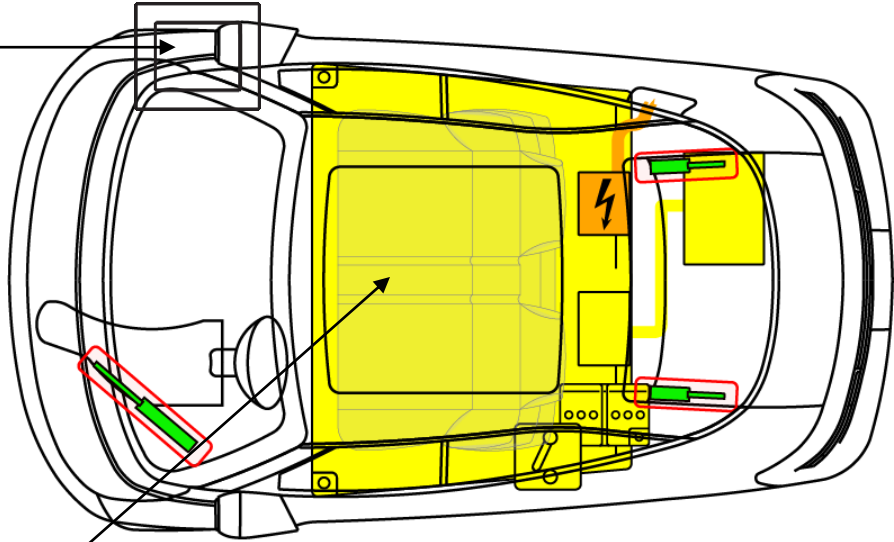


9.

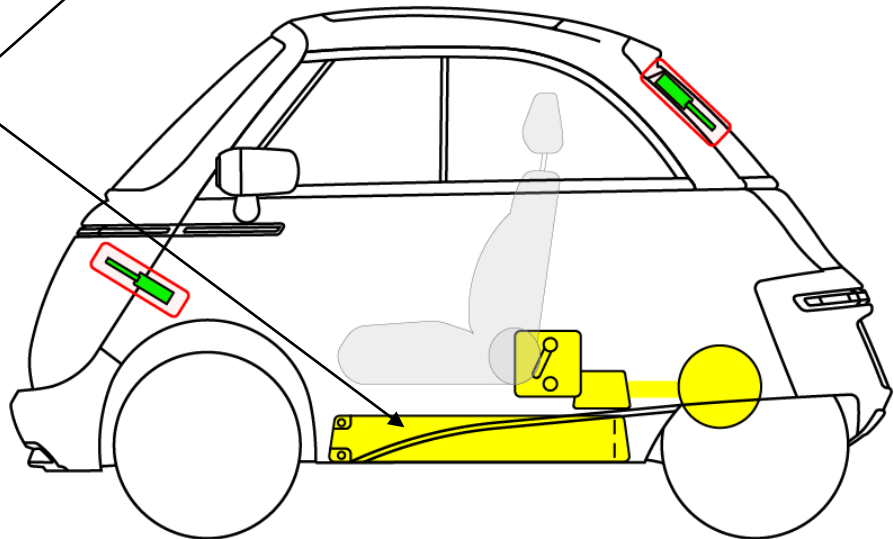

48 V
NMC



	Gas strut/ Preloaded spring		Zone requiring special attention
	Battery low voltage		230 Volt charging cable
	Battery pack, 48 Volt		Power cable / - component

1. Identification / recognition

! LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF. SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PPE.

Brand name front



Model name rear





Charge port





2. Immobilization / stabilization / lifting

Immobilize vehicle:

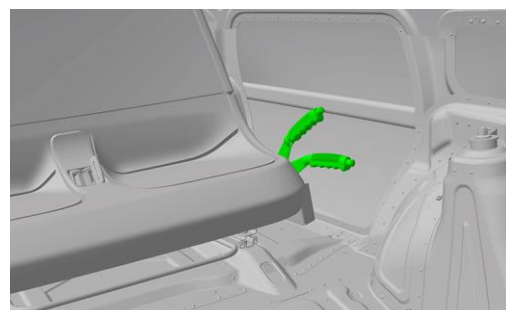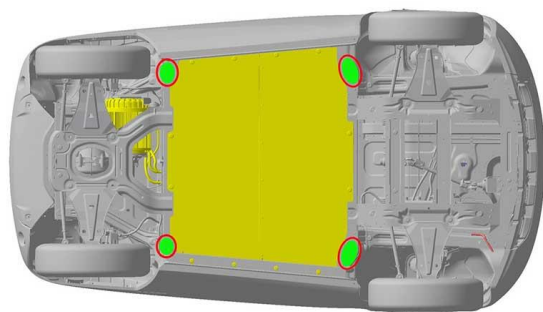1. Block wheels and set parking brake;
2. Push the P (park) button to select the P (park) position.



Lifting points:


-  Appropriate lifting points
-  Battery pack

3. Disable direct hazards / safety regulations




Access to the trunk

1. Press key button for 3 seconds






2. Emergency opening button in the trunk

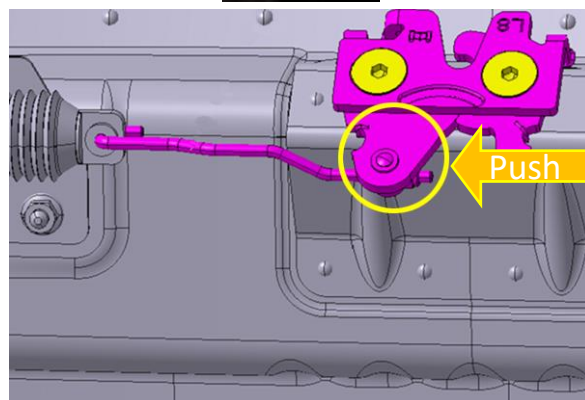

! THE HATCH CAN NOT BE OPENED MECHANICALLY FROM THE OUTSIDE!

1. Turn key to 'OFF' position and remove it.
2. Disconnect 12 Volt battery.

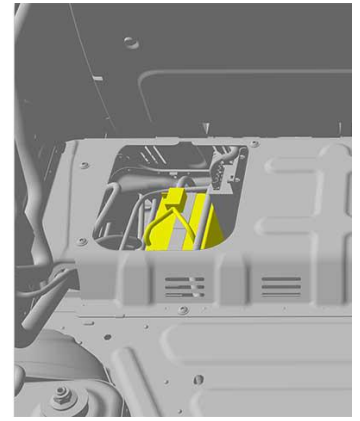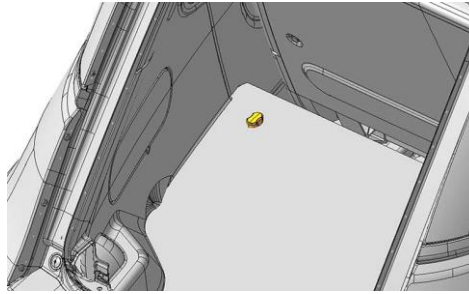


Safety regulations:



Always assume the vehicle is powered, even if it is silent!
 Make sure that the vehicle is immobilized and the propulsion system is deactivated;
 Never touch, cut, or open any orange high voltage power cable or high voltage component.
 This vehicle is not supplied with airbags, no automatic powertrain deactivation after collision.
 No SDC or Interlock available.

4. Access to the occupants

Seat adjustment

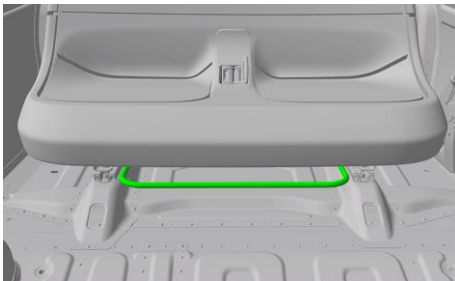

Glass types:

- A. Laminated glass.
- B. Tempered glass.



5. Stored energy / liquids / gases / solids


	48V	
	12V	

6. In case of fire

Extinguishing method for the battery pack:



USE LARGE AMOUNTS OF PURE WATER DIRECTLY TO THE BATTERY PACK



POTENTIAL RISK OF BATTERY RE-IGNITION / DELAYED IGNITION!

7. In case of submersion


- There is no increased risk of electric shock in water resulting from the high voltage system;
- If possible, remove the vehicle from the water and continue with the deactivation procedure for this vehicle (see chapter 3).

8. Towing / transportation / storage

Location front hook



Towing

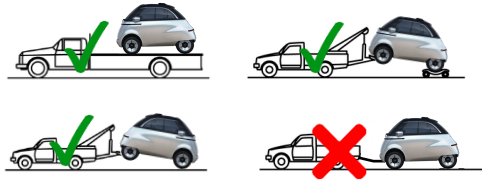

STORE VEHICLE IN AN OPEN-AIR PARKING AT SAFE DISTANCE \geq 5M FROM OTHER OBJECTS OR VEHICLES!




POTENTIAL RISK OF BATTERY RE-IGNITION / DELAYED IGNITION!


9. Important additional information

Outside

Front door release button

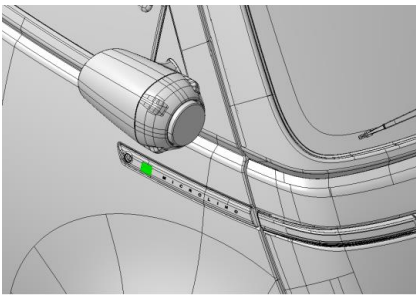

Mechanical release front door; press the door lightly to open

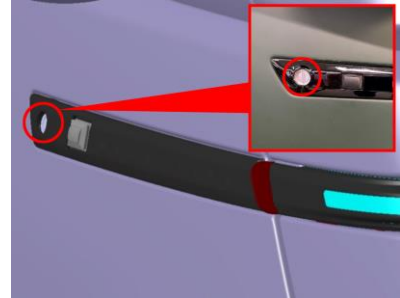

Inside

Front door release loop under the carpet



Front door release button behind the bar



10. Explanation of pictograms used

	Boot		Electric vehicle
	Warning high voltage		Risk of flammability
	Caution		Risk of damaging human health
	Use water to extinguish the fire		Risk of acute toxicity
	Use IR Camera (thermal imaging)		Risk of corrosive material / substances

Document N°

Micro_Microlino_Hatchback_2021_2d_Electric_EN.pdf

Version N°

02

Version date

11/2022

Page N°

4 / 4